

**TO**

---

**SPECIFICATION FOR APPROVAL**

DESCRIPTION: Pitch 0.50mm ZIF FPC Connector, R/A, SMT Type Bottom Contact

---

CUSTOMER PROD.NO/DWG.NO:

---

E&T PROD.NO: 6706K-XXXX-XXX

---

APPROVAL SHEET NO:

---

E&T DWG. NO./DOCUMENT: 6706K-XXXX-XXX

---

REV: A3

**PLEASE RETURN TO US ONE COPY OF "SPECIFICATION FOR APPROVAL" WITH YOUR APPROVED SIGNATURES.**

APPROVED SIGNATURES			



**ENTERY INDUSTRIAL CO., LTD.  
E&T ELECTRONICS (DONG GUAN) CO., LTD.  
E&T ELECTRONICS (SU ZHOU) CO., LTD.**

**ENTERY INDUSTRIAL CO., LTD.**

**Title : Pitch 0.50mm ZIF FPC Connector,  
R/A, SMT Type Bottom Contact**

**RELEASE  
HISTORY**

**Title: Pitch 0.50mm ZIF FPC Connector, R/A, SMT Type Bottom Contact**

<b>Rev</b>	<b>Description</b>
<b>A3</b>	<b>11.17,2011'</b>


This Document Contains Information That Is Proprietary To  
E&T And Should Not Be Used Without Written Permission

Document No.

**6706K-XXXX-XXX**

Prepared By: Hunter Lin

Date: 10.27.2009'

Checked By: 

Date: 11.17, 2011'

Approved By: 

Date:



# ENTERY INDUSTRIAL CO., LTD.

## PRODUCT SPECIFICATION

### 1. SCOPE :

This specification covers the pitch 0.50 mm ZIF FPC connector series.

### 2. PRODUCT NAME AND PART NUMBER :

Product Name	E&T Part Number
0.50mm ZIF FPC Connector, R/A, SMT Type Bottom Contact	6706K-XXXX-XXX

### 3. RATINGS :

Item	Standard	
Rated Voltage (MAX.)	50V	(AC(rms/DC))
Rated Current (MAX.)	0.5A	
Operating Temperature Range	-40 <sup>0</sup> C ~ +85 <sup>0</sup> C	

\*Including terminal temperature rise

### 4.PERFORMANCE :

#### 4- 1 Electrical Performance

Item	Test Condition	Requirement
4-1-1 Contact Resistance	Test Current: 10 mA Max. Test Voltage: 20mV Max	20 mΩ MAX.
4-1-2 Insulation Resistance	Test Voltage: 500V DC. Test Duration: 1 minutes. Test Method: MIL-STD-202, method 302	100 MΩ Min.
4-1-3 Dielectric Strength	Test Voltage:500V AC. Test Time: 60 sec. Test Method: MIL-STD-202, Method 301.	No Breakdown

# ENTERY INDUSTRIAL CO., LTD.

## 4-2 Mechanical Performance

Item		Test Condition	Requirement	
4-2-1	FPC Retention Force	Test Speed: 25±3 mm/min.	Refer to paragraph 6	
4-2-2	Terminal / Housing Retention Force	Test Speed: 25mm/min.	0.1kgf (Min)	
4-2-3	Durability	Insert and withdraw actuator up to 20cycles at the speed rate of less than 10 cycles/minute.	Contact Resistance	
			Initial Value	≤ 20 mΩ
			Final Value	≤ 40 mΩ

## 4-3 Environmental Performance and Others


Item		Test Condition	Requirement	
4-3-1	Vibration	Amplitude : 1.5 mm Frequency range: 10~55~10 Hz in 1 minute Duration: 2 hours in each X.Y.Z axes Current: 100mA. Test Method: MIL-STD-202F, Method 201	Appearance	No Damage
			Contact Resistance	≤ 40 mΩ
			Discontinuity	1μsec
4-3-2	Heat Resistance	Temperature: 85±2℃ Duration: 96 hours Test Method: MIL-STD-202, Method 108.	Appearance	No Damage
			Contact Resistance	≤ 40 mΩ
4-3-3	Cold Resistance	Temperature: -40±2℃ Duration: 96 hours Test Method: JIS C60068-2-1	Appearance	No Damage
			Contact Resistance	≤ 40 mΩ
4-3-4	Humidity	Temperature: 40±2℃ Relative Humidity: 90~95% Duration: 96 hours Test Method: MIL-STD-202F , Method 103	Appearance	No Damage
			Contact Resistance	≤ 40 mΩ
			Insulation Resistance	≥ 40mΩ
			Dielectric Strength	Must meet 4-1-3



# ENTERY INDUSTRIAL CO., LTD.

## 5. INFRARED REFLOW CONDITION

- 1) Ascending time to preheating temperature 170°C shall be 40 seconds minimum.
- 2) Preheating shall be fixed at 160...180°C for 60...90 seconds.
- 3) Heating shall be fixed at 220°C for 50...60 seconds.
- 4) At 260±5°C peak shall be 10 seconds maximum.

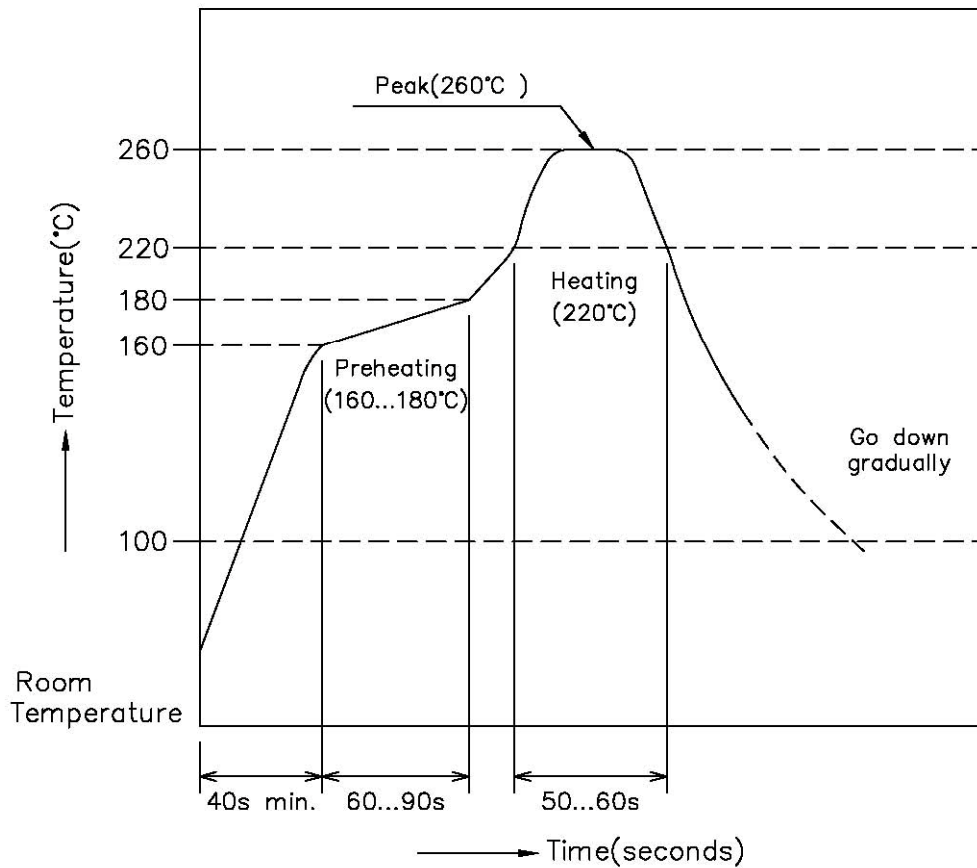

# ENTERY INDUSTRIAL CO., LTD.

## 6. 0.5mm FPC RETENTION FORCE SPEC

No of CKT	UNIT	Retention Force (MIN)		No of CKT	UNIT	Retention Force (MIN)	
		1 st	10 th			1 st	10 th
4	N	1.960	1.225	23	N	6.615	5.880
	Kgf	0.200	0.125		Kgf	0.675	0.600
5	N	2.205	1.470	24	N	6.860	6.125
	Kgf	0.225	0.150		Kgf	0.700	0.625
6	N	2.450	1.715	25	N	7.105	6.370
	Kgf	0.250	0.175		Kgf	0.725	0.650
7	N	2.695	1.960	26	N	7.350	6.615
	Kgf	0.275	0.200		Kgf	0.750	0.675
8	N	2.940	2.205	27	N	7.595	6.860
	Kgf	0.300	0.225		Kgf	0.775	0.700
9	N	3.185	2.450	28	N	7.840	7.105
	Kgf	0.325	0.250		Kgf	0.800	0.725
10	N	3.430	2.695	29	N	8.085	7.350
	Kgf	0.350	0.275		Kgf	0.825	0.750
11	N	3.675	2.940	30	N	8.330	7.595
	Kgf	0.375	0.300		Kgf	0.850	0.775
12	N	3.920	3.185	31	N	8.575	7.840
	Kgf	0.400	0.325		Kgf	0.875	0.800
13	N	4.165	3.430	32	N	8.820	8.085
	Kgf	0.425	0.350		Kgf	0.900	0.825
14	N	4.410	3.675	33	N	9.065	8.330
	Kgf	0.450	0.375		Kgf	0.925	0.850
15	N	4.655	3.920	34	N	9.310	8.575
	Kgf	0.475	0.400		Kgf	0.950	0.875
16	N	4.900	4.165	35	N	9.555	8.820
	Kgf	0.500	0.425		Kgf	0.975	0.900
17	N	5.145	4.410	36	N	9.800	9.065
	Kgf	0.525	0.450		Kgf	1.000	0.925
18	N	5.390	4.655	37	N	10.045	9.310
	Kgf	0.550	0.475		Kgf	1.025	0.950
19	N	5.635	4.900	38	N	10.290	9.555
	Kgf	0.575	0.500		Kgf	1.050	0.975
20	N	5.880	5.145	39	N	10.535	9.800
	Kgf	0.600	0.525		Kgf	1.075	1.000
21	N	6.125	5.390	40	N	10.780	10.045
	Kgf	0.625	0.550		Kgf	1.100	1.025
22	N	6.370	5.635				
	Kgf	0.650	0.575				



## FPC /FFC Connector Front Flip Lock Type Handling Precautions

This manual is to describe basic precautions. When there are doubtful points in use of, please contact E&T.

### 1. Common Handling Precautions

- Do not expose E&T's ZIF FPC/FFC connector, processing process product and processing product to corrosive substance, corrosive gas, high temperature and high humidity and direct sunshine. It causes corrosion of contact and deterioration of insulation performance of housing, etc., so that it causes motion defect of appliances.
- Do not apply external load to E&T's ZIF FPC/FFC connector, processing process product and processing product . Deformation and breakage, etc. occur, and it causes performance defect of.
- There may be slight differences in the housing coloring, but there will be no influence on the product's performance.
- Please add a stiffener on the flexible printed circuit (FPC/FFC) when you mount the connector onto FPC in order to prevent deformation of the FPC/FFC.
- Please do not conduct any "washing process" on the connector because it may damage the product's function.

### 2. PC Board Precautions

- Exercise caution when handling boards with the connectors installed. Do not apply any forces affecting soldered joints. (see figure 1).
- The mounting specification for coplanarity does not include the influence of warpage of the printed circuit board. (see figure 1).

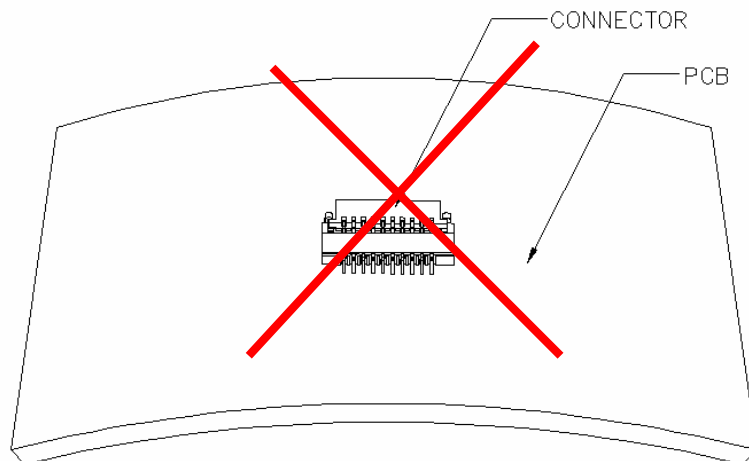


Figure 1.

### 3. Operation

#### FPC/FFC Insertion Procedure.

- 1) Connector installed on the board.  
Lift up the actuator(Lock). Use thumb or index finger. (see figure 2).

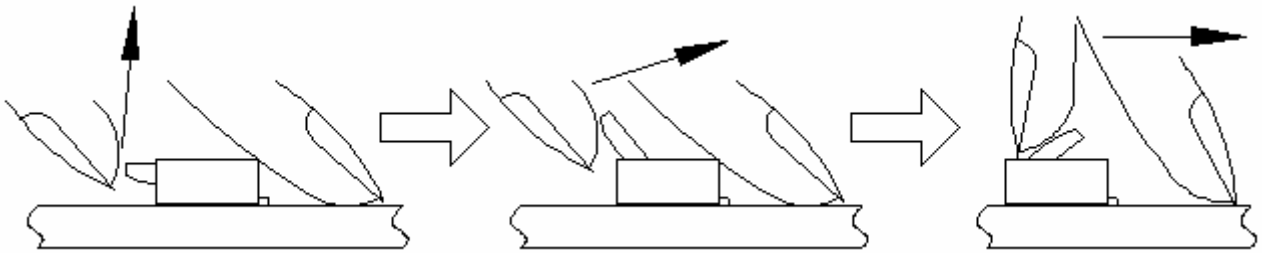


Figure 2.

- 2) Assure that the FPC/FFC is fully inserted parallel to mounting surface, with the exposed conductive traces facing down. (see figure 3).

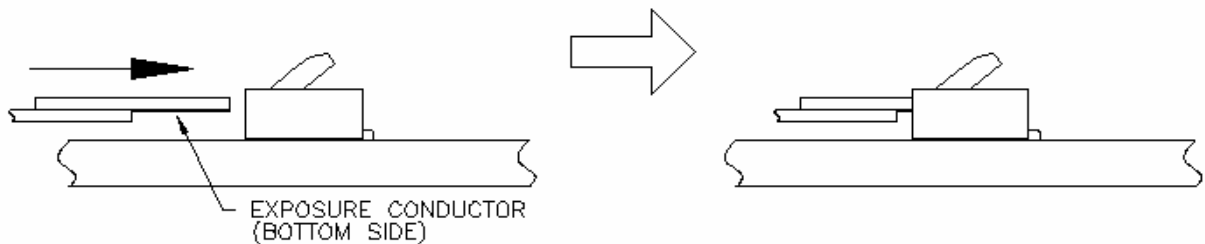


Figure 3.

- 3) Rotate down the actuator(Lock) until firmly closed. It is critical that the inserted FPC is not moved and remains fully inserted. Should the FPC be moved, open the actuator(Lock) and repeat the process, starting with Step 1(see figure 4).

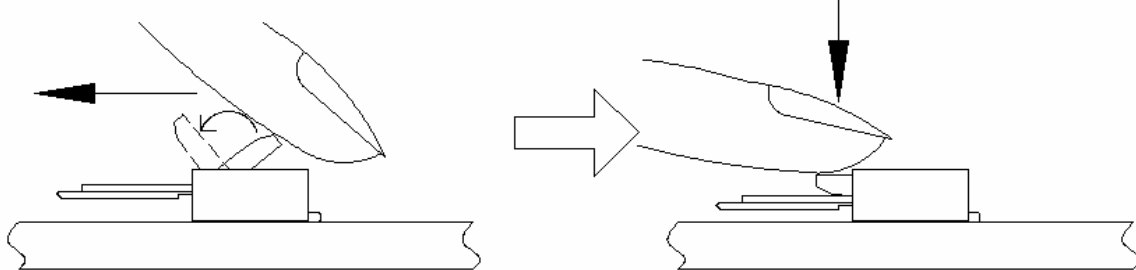


Figure 4.

#### FPC/FFC Removal.

- 1) Lift up the actuator(Lock). Carefully withdraw the FPC/FFC. (see figure 5).

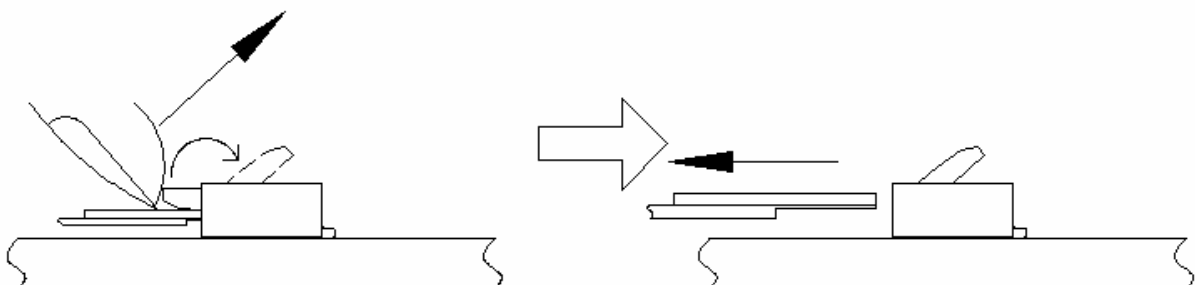


Figure 5.

## 4. Precautions When Inserting or Withdrawal FPC/FFC

- FPC/FFC to be insertion and withdrawal at an angle of about 15°, and the FPC/FFC should be inserted firmly all the way to the back. (see figure 6).

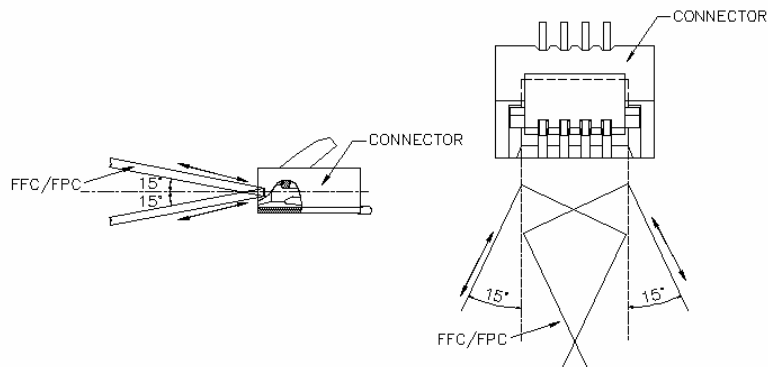


Figure 6.

- Do not apply excessive force or use any type of tool to operate the actuator(Lock).
- When locking the actuator(Lock), please make sure that the actuator is entirely closed by pressing on the entire actuator. Pushing the one specific point of the actuator may cause the actuator to be detached or damaged. When locking the longer actuator(Lock), please use two points to put pressure on locking. (see figure 7).

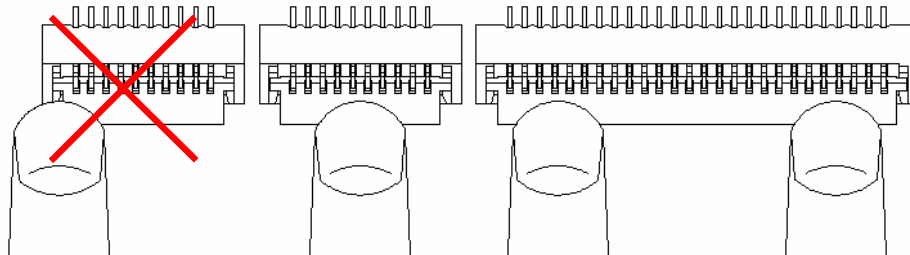


Figure 7.

- The connector will assure reliable performance when the actuator is open to an angle (please refer to drawing) maximum. Do not exceed this angle, as this may cause permanent damage to the connector. (see figure 8)
- Avoid grasping the actuator(Lock) with two fingers or lifting the actuator(Lock) with fingernail. (see figure 8)
- Do not apply force in the direction of arrows. Doing this may cause the actuator to be detached or damaged. (see figure 8).

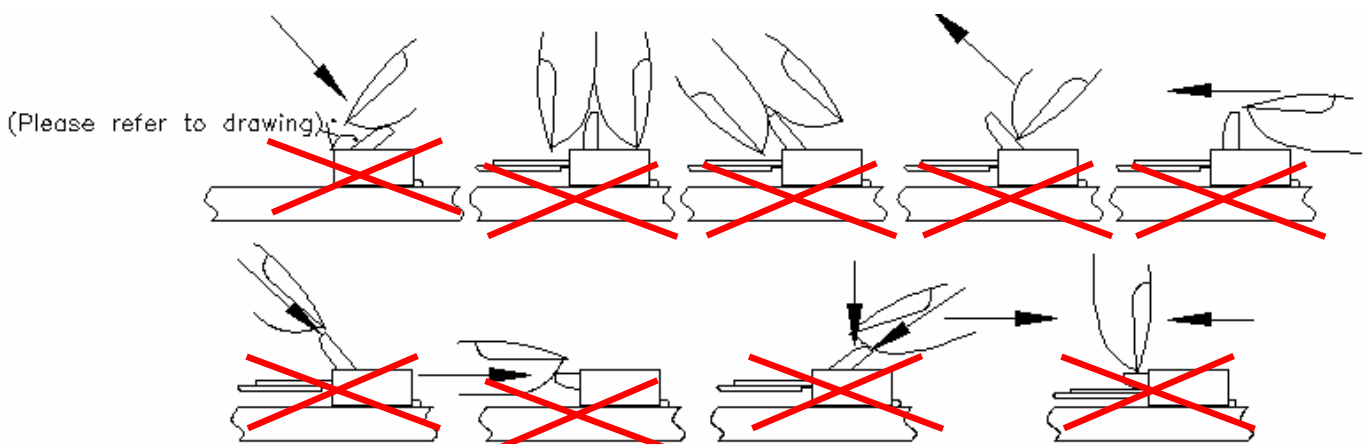


Figure 8.

# ENTERY INDUSTRIAL CO., LTD.

- When inserting the FPC/FFC, do not forcefully rub against the surface beneath the connector insertion slot. Doing so will result in the FPC/FFC forcefully striking the contacts and this will cause contact deformation, peeling of the FPC/FFC conductors, and other irregularities. (see figure 9).

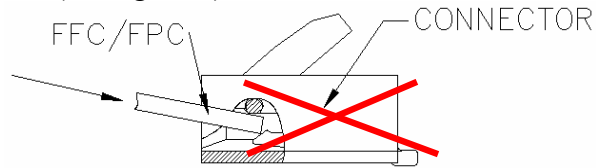


Figure 9.

- Do not apply any forces affecting soldered joints. Do not apply upward pull-force to the FPC/FFC close to the connector. (see figure 10).
- If necessary, please fix the FPC/FFC directly on the chassis. Also, please avoid pulling the FPC/FFC vertically or twisting the FPC back and force horizontally while it is inserted in the connector(see figure 10).
- Forming processing is conducted to FPC so as not to load force to connector. (see figure 10).

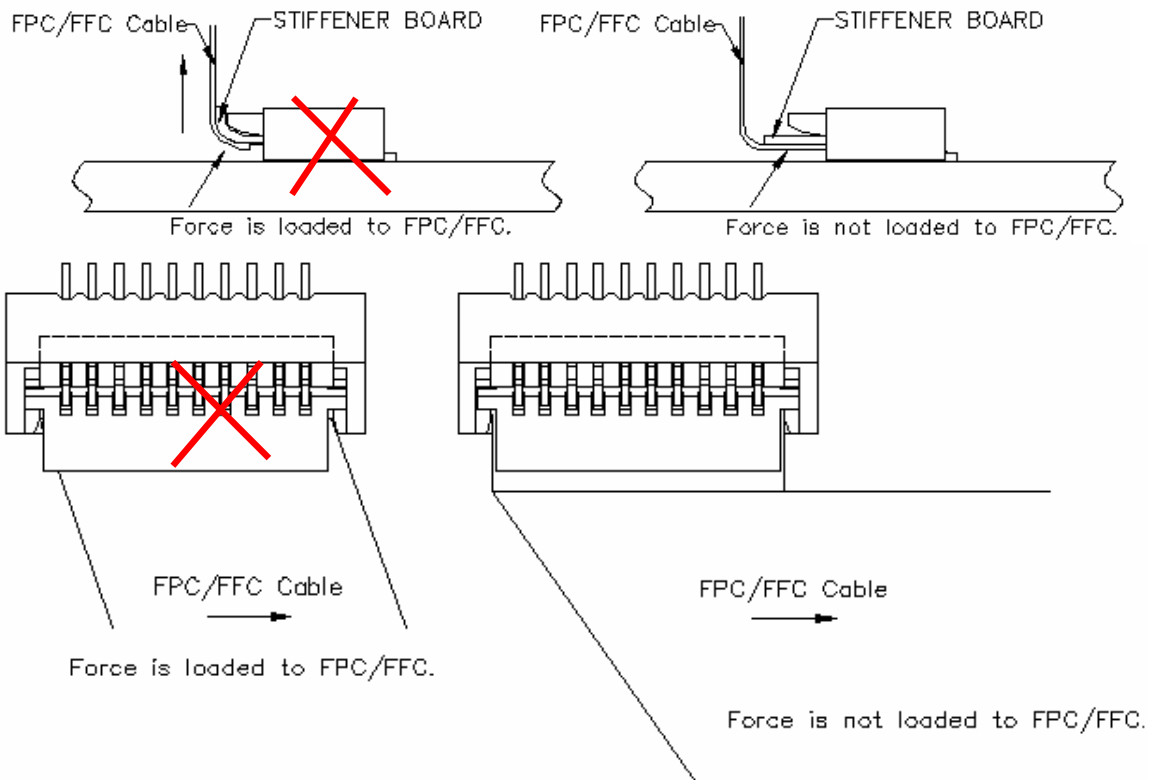


Figure 10.

# ENTERY INDUSTRIAL CO., LTD.

## RELEASE HISTORY

<b>Rev.</b>	<b>Revisions</b>	<b>Date</b>	<b>Executor</b>	<b>Description</b>
A2	RE201108011	AUG-11-2011	Max	ADD Handling Precautions
A3	RE201111014 RE201111028	NOV-17-2011	JIMMY	LCP 6130LX Change LCP E130I Cancel Packaging Spec