







NOTES: MATERIAL & FINISH
 1.INSULATOR:HIGH-TEMP THERMOPLASTIC, UL94V-0
 COLOR:NATURE
 2.CONTACT:COPPER ALLOY
 PLATING:GOLD FLASH & TIN
 OVERALL NICKEL UNDER PLATED
 Δ3.ORDER INFORMATION: 3753K-XXXN- OD X

ENTERY INDUSTRIAL CO., LTD.
 APR 14, 2014
 R&D D.C.C. ISSUED

PACKING: R: PLASTIC REEL
 E: TUBE
 L: PAPER REEL
 TYPE
 N: STANDARD
 PIN NO.
 PLATING: E: TIN
 F: CONTACT GOLD FLASH,
 FITTING NAIL TIN

3753K: 1.0 WIRE TO BOARD SMT R/A DUAL ROW
 (HALOGEN-FREE)

PIN NO.	A	B	C	D
06	2.0	5.6	4.2	4.9
08	3.0	6.6	5.2	5.9
10	4.0	7.6	6.2	6.9
12	5.0	8.6	7.2	7.9
14	6.0	9.6	8.2	8.9
16	7.0	10.6	9.2	9.9
18	8.0	11.6	10.2	10.9
20	9.0	12.6	11.2	11.9
22	10.0	13.6	12.2	12.9
24	11.0	14.6	13.2	13.9
26	12.0	15.6	14.2	14.9
28	13.0	16.6	15.2	15.9
30	14.0	17.6	16.2	16.9
32	15.0	18.6	17.2	17.9
34	16.0	19.6	18.2	18.9
36	17.0	20.6	19.2	19.9
38	18.0	21.6	20.2	20.9
40	19.0	22.6	21.2	21.9
42	20.0	23.6	22.2	22.9
44	21.0	24.6	23.2	23.9
46	22.0	25.6	24.2	24.9
48	23.0	26.6	25.2	25.9
50	24.0	27.6	26.2	26.9

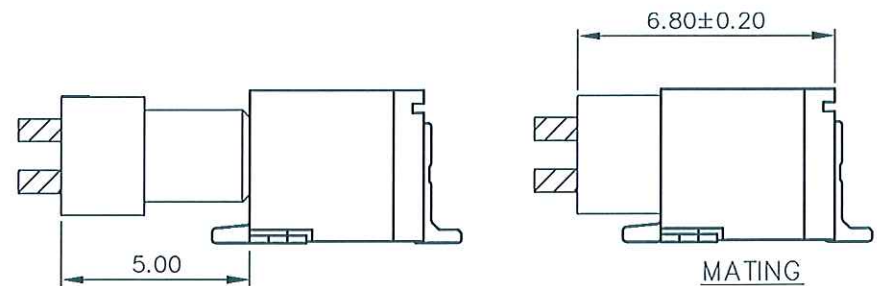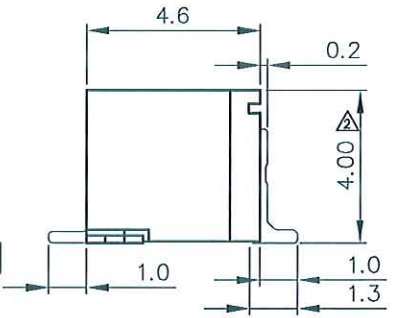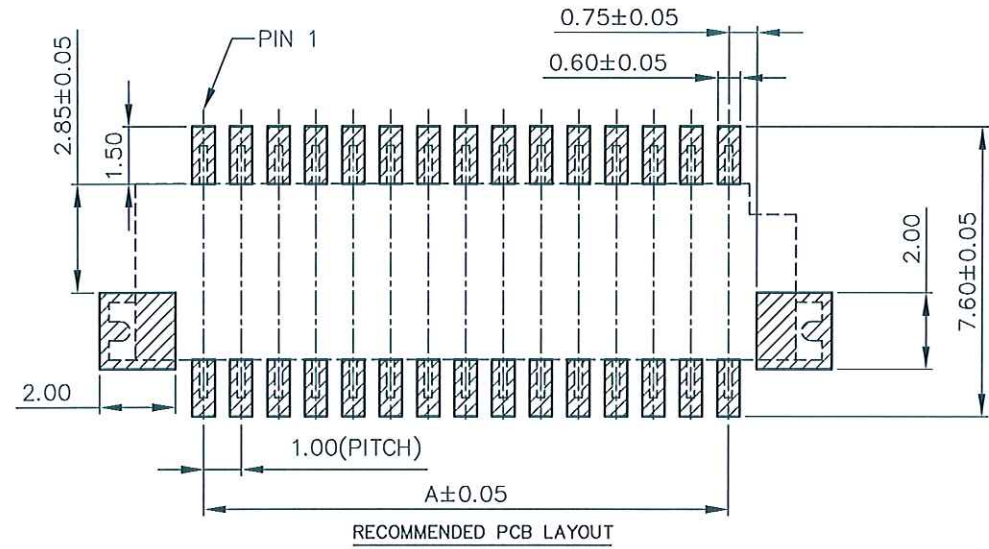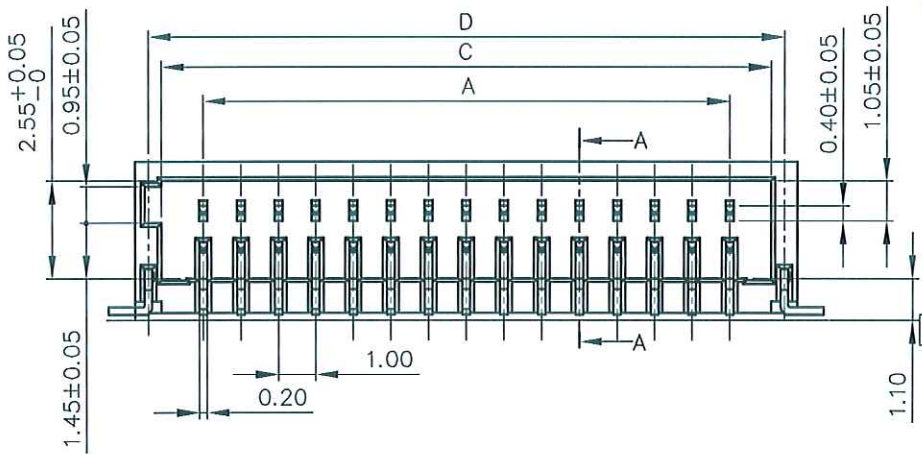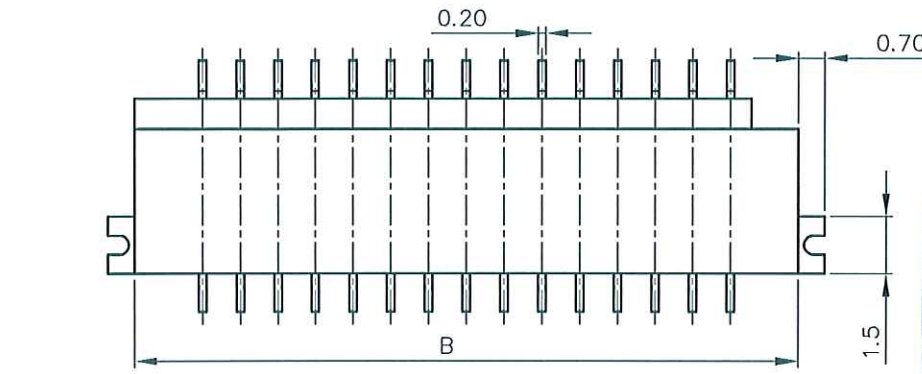

CUSTOMER				恩得利工業股份有限公司 E&T ENTERY INDUSTRIAL CO., LTD.			
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN John APR-30-2010		PART NO. Δ 3753K-XXXN-ODX			
X.X ±0.30		CHECKED		TITLE: 1.0 WTB SMT R/A TYPE DUAL ROW			
X.XX ±0.20		APPROVED John 4/13		SHEET 1/1			
X.XXX ANG. ±0.30'		SER REVISIONS		CHK DATE		UNIT SCALE SIZE REV MM 5:1 A4 C	
Δ	RE201206014	Max	12/25/12				
Δ	RE201211010	Juno	11/13/12				
Δ	RE201004014	John	04/30/10				