


1 2 3 4 5 6 7 8 9 0






NOTES: MATERIAL & FINISH
 1.INSULATOR: HIGH-TEMP THERMOPLASTIC, UL94V-0
 COLOR: NATURAL OR BLACK
 2.CONTACT: COPPER ALLOY
 PLATING: GOLD FLASH OR TIN OR MATTE-TIN, OVER ALL NICKEL UNDER PLATED
 3.SHIELDING/CAP: PLASTIC Δ
 4.ORDER INFORMATION:
 3950K -X XX X-00,02 X

PACKING: E: TUBE
 L: PAPER REEL Δ
 R: PLASTIC REEL
 TYPE: 00: NATURAL
 02: BLACK Δ
 C: ADD CAP
 Y: CAP & PRINTING DATE CODE Δ
 PIN NO.

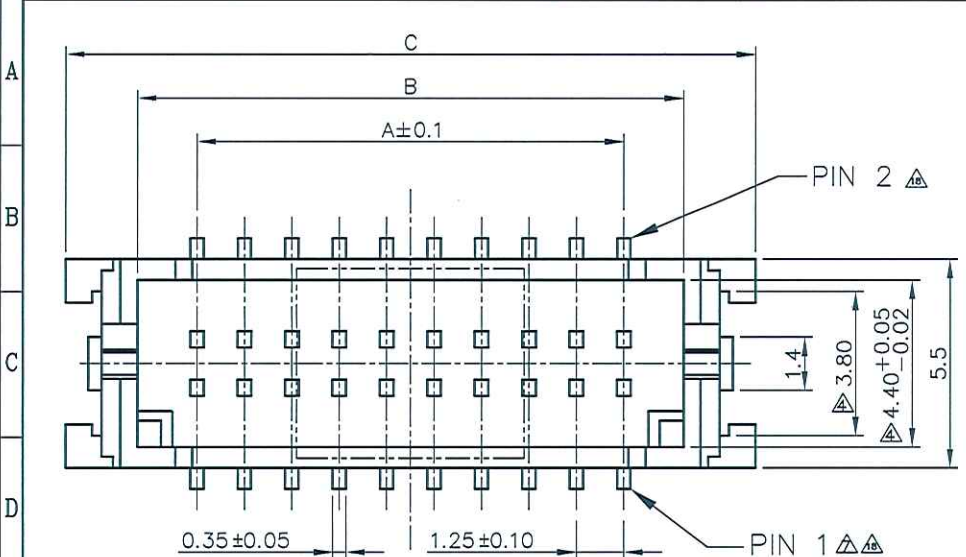

PLATING:
 E: TIN
 Δ B: CONTACT AREA GOLD FLASH
 SOLDER AREA TIN
 Δ Q: 100u"~160u" MATTE-TIN
 Δ F: CONTACT GOLD FLASH, FITTING NAIL
 Δ 3950K: 1.25 WTB SMT V/T TYPE DUAL ROW
 (HALOGEN FREE)

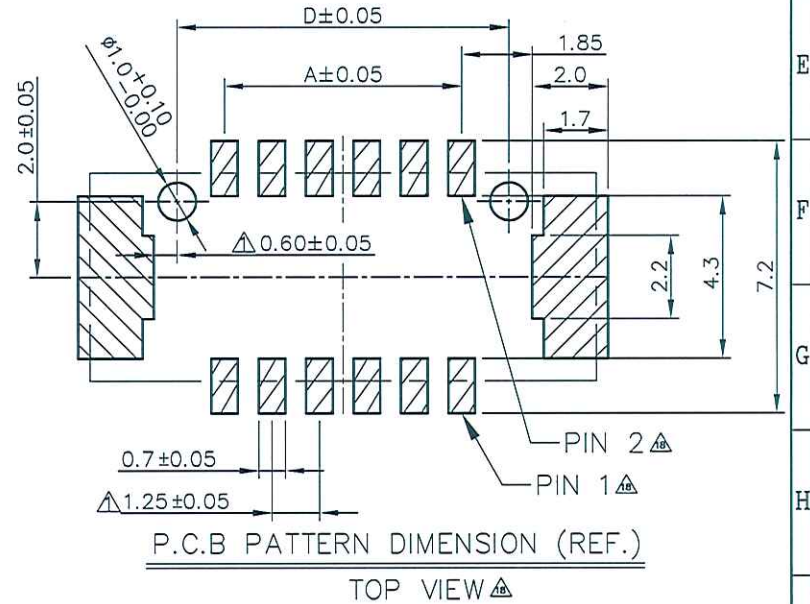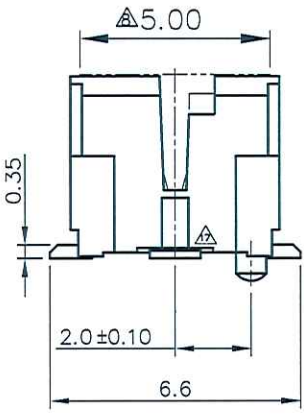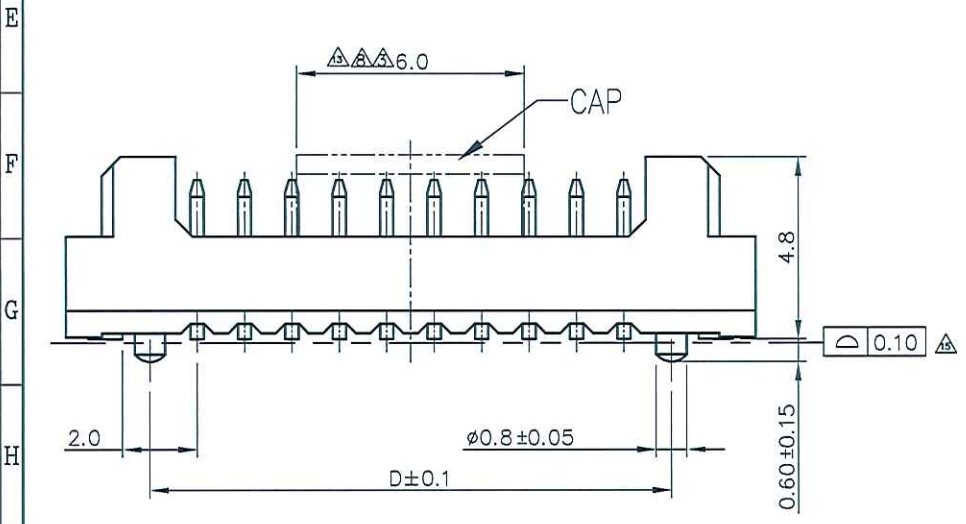

P/O	A	B	C	D
3950K-X10X-0XX	5.00	8.15	11.95	7.50
3950K-X20X-0XX	11.25	14.40	18.20	13.75
3950K-X30X-0XX	17.50	20.65	24.45	20.00
3950K-X40X-0XX	23.75	26.90	30.70	26.25

ENTERY INDUSTRIAL CO., LTD.
 MAY - 7. 2013
 R&D D.C.C. ISSUED

SER	REVISIONS	CHK	DATE
Δ	REN130501	Juno	05/03/13
Δ	RE201212020	MAX	01/07/13
Δ	RE201206014 RE201210002	MAX	12/26/12
Δ	REN101122	JIMMY	11/22/10
Δ	REN101020	JIMMY	10/19/10
Δ	RE200907042	JOHN	07/27/09

CUSTOMER	恩得利工業股份有限公司 ENTERY INDUSTRIAL CO., LTD.
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN John SEP-10-2004
X.X ±0.30	CHECKED
X.XX ±0.20	APPROVED [Signature]
X.XXX ±0.30'	SHEET 1/1
ANG. ±0'30'	UNIT MM
	SCALE 5:1
	SIZE A4
	REV S
	PART NO. Δ 3950K-XXXX-00,02X
	TITLE: 1.25 WTB SMT V/T TYPE DUAL ROW

1 2 3 4 5 6 7 8 9 0