

NOTES: MATERIAL & FINISH

- HOUSING: HIGH THERMOPLASTIC, UL94V-0  
COLOR: BLACK
- LOCK: HIGH THERMOPLASTIC, UL94V-0  
COLOR: NATURE
- CONTACT: COPPER ALLOY

PLATING: GOLD FLASH OR TIN OVERALL NICKEL UNDER PLATED

- FITTING NAIL: COPPER ALLOY

PLATING: TIN PLATED

- ORDER INFORMATION:

6780K-X XX N- 03 X

PACKING: E: TUBE  
R: PLASTIC REEL  
L: PAPER REEL

TYPE STANDARD

PIN

PLATING: E: TIN

F: CONTACT GOLD, FITTING NAIL TIN




Q: MATTE-TIN

Y AND V: GOLD FLASH




(WITH NICKEL BARRIER)

6780K: 0.8 ZIF FPC SMT R/A TYPE TOP CONTACT (HALOGEN FREE)


PIN	A	B	C
04	10.05	2.40	4.10
05	10.85	3.20	4.90
06	11.65	4.00	5.70
07	12.45	4.80	6.50
08	13.25	5.60	7.30
09	14.05	6.40	8.10
10	14.85	7.20	8.90
11	15.65	8.00	9.70
12	16.45	8.80	10.50
13	17.25	9.60	11.30
14	18.05	10.40	12.10
15	18.85	11.20	12.90
16	19.65	12.00	13.70
17	20.45	12.80	14.50
18	21.25	13.60	15.30
19	22.05	14.40	16.10
20	22.85	15.20	16.90
21	23.65	16.00	17.70
22	24.45	16.80	18.50
23	25.25	17.60	19.30
24	26.05	18.40	20.10
25	26.85	19.20	20.90
26	27.65	20.00	21.70
27	28.45	20.80	22.50
28	29.25	21.60	23.30
29	30.05	22.40	24.10
30	30.85	23.20	24.90
31	31.65	24.00	25.70
32	32.45	24.80	26.50
33	33.25	25.60	27.30
34	34.05	26.40	28.10
35	34.85	27.20	28.90
36	35.65	28.00	29.70
37	36.45	28.80	30.50
38	37.25	29.60	31.30
39	38.05	30.40	32.10
40	38.85	31.20	32.90

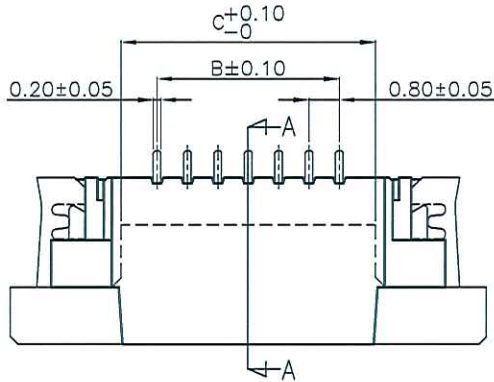

SECTION A-A

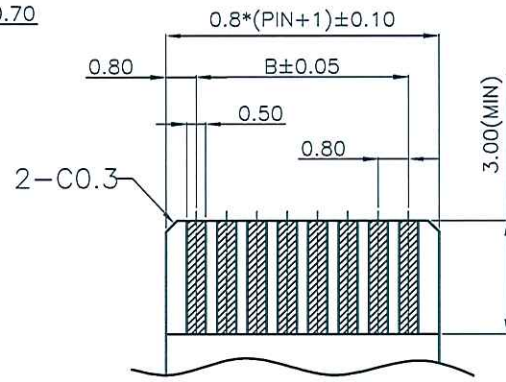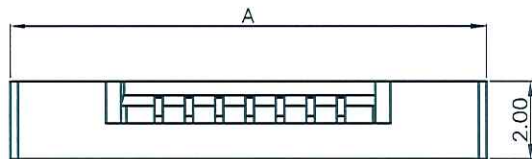

RECOMMENDED APPLICABLE FPC LAYOUT (THICKNESS: 0.3±0.03)

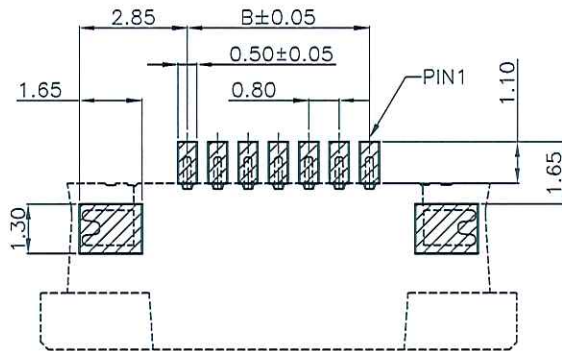

RECOMMENDED P.C. BOARD PATTERN DIM.(REF)



ENTERY INDUSTRIAL CO., LTD.  
AUG - 8. 2013  
R&D D.C.C. ISSUED

CUSTOMER		E&T 恩得利工業股份有限公司 ENTERY INDUSTRIAL CO., LTD.	
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN JUNO JUL-30-2013	PART NO. 6780K-XXXN-03X	
X.X ±0.30	CHECKED	TITLE: 0.8 ZIF FPC SMT R/A TYPE TOP CONTACT	
X.XX ±0.20	APPROVED	SHEET	
X.XXX	ANG. ±0°30'	UNIT MM SCALE 5:1 SIZE A4 REV A	
REVISIONS	CHK DATE		

REVISIONS	CHK	DATE
RE201307017	JUNO	07/30/13